

Q.CELLS
YIELD SECURITY

- ✓ ANTI PID TECHNOLOGY (APT)
- ✓ HOT-SPOT PROTECT (HSP)
- ✓ TRACEABLE QUALITY (TRA.Q™)

MULTICRYSTALLINE SOLAR MODULE

Q.BASE - G2 235-245

Reliable large-scale operation has a new name

The multicrystalline solar module **Q.BASE-G2** is our economist for utility-scale installations. **Q.BASE-G2** is the safest and most reliable solar module on the market, because thanks to our new Q-Cells technologies, it is the worldwide first PID free¹ and Hot-Spot free solar module. This makes **Q.BASE-G2** your safe choice for secure yields.

THE NEW Q-CELLS GENERATION

- Anti PID Technology (APT)¹: **No power loss caused by potential induced degradation.**
- Traceable Quality (Tra.Q™): **First traceable and forgery proof solar module on the market.**
- New cell concept with reduced serial resistance: **Increased power on module level.**

THE PROVEN Q-CELLS VALUES

- Hot-Spot Protect (HSP): **Increased fire and performance safety.**
- Tested for wind/snow loads up to 5400 Pa: **Strong in every weather condition.**
- 25-year performance warranty, 10-year product warranty²: **Secure investment.**



THE IDEAL
SOLUTION FOR:



GROUND-MOUNTED
SOLAR POWER PLANTS



ROOFTOP ARRAYS ON
COMMERCIAL AND
INDUSTRIAL BUILDINGS

¹ APT test conditions: Cells at -600 V against frame, wet module surface, 25 °C, 300 h
² Subject to registration, and in accordance with the valid regional warranty terms.

Q.CELLS

MECHANICAL SPECIFICATION		TECHNICAL DRAWING
Format	1670 mm x 1000 mm x 50 mm (including frame)	
Weight	21 kg	
Front Cover	3.2 mm thermally pre-stressed solar glass	
Back Cover	Composite film	
Frame	Anodized aluminum	
Cell	6 x 10 multicrystalline solar cells	
Junction box	134 mm ^{±18} x 169 mm ^{±17} x 26 mm ^{±6} Protection class IP 65, with bypass diodes	
Cable	4 mm ² Solar cable; (+) 1100 mm, (-) 1100 mm	
Connector	Yamaichi Y-SOL4 (compatible with MC4), IP 68	
Grounding points	∅ 4.5 mm	

ELECTRICAL CHARACTERISTICS

PERFORMANCE AT STANDARD TEST CONDITIONS (STC: 1000 W/m², 25 °C, AM 1.5 SPECTRUM)



POWER CLASS			215	220	225	230	235 ¹	240*	245*	250
Nominal Power (±2.5 W)	P_{MPP}	[W]	215	220	225	230	235	240	245	250
Short Circuit Current	I_{SC}	[A]	8.37	8.44	8.51	8.58	8.65	8.72	8.78	8.85
Open Circuit Voltage	V_{OC}	[V]	36.02	36.24	36.47	36.69	36.92	37.14	37.36	37.59
Current at Maximum Power	I_{MPP}	[A]	7.74	7.82	7.90	7.99	8.07	8.15	8.24	8.32
Voltage at Maximum Power	V_{MPP}	[V]	28.34	28.55	28.75	28.96	29.16	29.37	29.57	29.78
Efficiency	η	[%]	≥12.7	≥13.0	≥13.3	≥13.6	≥13.9	≥14.2	≥14.5	≥14.8

PERFORMANCE AT NORMAL OPERATING CELL TEMPERATURE (NOCT: 800 W/m², 47 ± 3 °C, AM 1.5 SPECTRUM)

POWER CLASS			215	220	225	230	235 ¹	240*	245*	250
Nominal Power (±2.5 W)	P_{MPP}	[W]	156.9	159.9	163.4	166.2	169.4	172.7	175.9	179.0
Short Circuit Current	I_{SC}	[A]	6.59	6.61	6.68	6.71	6.77	6.84	6.88	6.93
Open Circuit Voltage	V_{OC}	[V]	32.68	32.82	33.00	33.19	33.45	33.71	33.89	34.07
Current at Maximum Power	I_{MPP}	[A]	6.05	6.08	6.17	6.22	6.28	6.33	6.38	6.44
Voltage at Maximum Power	V_{MPP}	[V]	25.99	26.32	26.54	26.76	27.04	27.31	27.56	27.82

¹ Measurement tolerances STC: ± 3 % (P_{MPP}); ± 10 % (I_{SC}, V_{OC}, I_{MPP}, V_{MPP}) ² Measurement tolerances NOCT: ± 5 % (P_{MPP}); ± 10 % (I_{SC}, V_{OC}, I_{MPP}, V_{MPP}) * Core class

PERFORMANCE AT LOW IRRADIANCE TYPICAL CHARACTERISTICS AT DIFFERENT IRRADIANCES

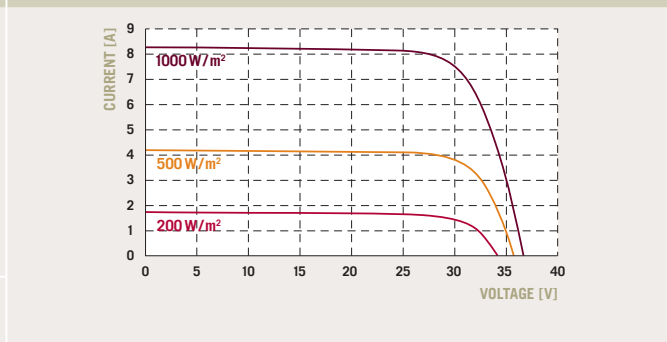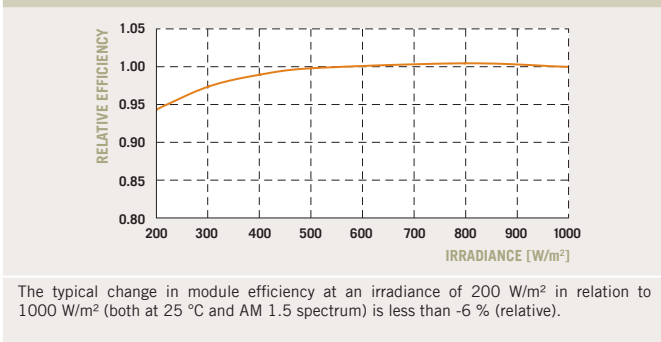

TEMPERATURE COEFFICIENTS (AT 1000 W/m², 25 °C, AM 1.5 SPECTRUM)

Temperature Coefficient of I_{SC}	α	[%/K]	+0.06	Temperature Coefficient of V_{OC}	β	[%/K]	-0.32
Temperature Coefficient of P_{MPP}	γ	[%/K]	-0.45				

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V_{sys}	[V]	1000	Safety Class	II
Maximum Reverse Current I_r	[A]	20	Fire Rating	C
Wind/Snow Load	[Pa]	5400	Permitted module temperature on continuous duty	-40 °C up to +85 °C

QUALIFICATIONS AND CERTIFICATES PARTNER

IEC 61215 (Ed.2), IEC 61730 (Ed.1) Application class A
This data sheet complies with DIN EN 50380.

PARTNER

NOTE: Installation instructions must be followed. See the installation and operating manual or contact the technical service for further information on approved installation and use of this product.

Specifications subject to technical changes © Q-Cells SE Q-BASE-G2_English_2011-06_02