

156 Series Polycrystalline

Solar Module

235W, 240W, 245W, 250W



High Module Conversion Efficiency



Easy Installation and Handling for Various Applications



Withstanding Mechanical Load up to 5400 Pa



Conform with PV Standards: IEC 61215:2005,
IEC 61730:2004, UL 1703



ISO9001, OHSAS18001, ISO14001



We provide a 10 years material and workmanship guarantee for our modules. In addition, a 90%-power-output guarantee for 10 years and a 80%-power-output guarantee for 25 years of the modules life are provided.

10-year
material & workmanship

10-year
90% power output

25-year
80% power output




156 Series Polycrystalline

Solar Module


235W, 240W, 245W, 250W

Dimension

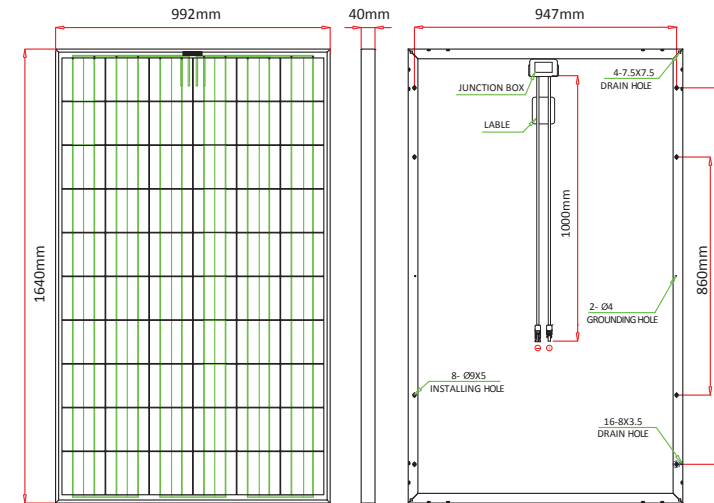

Drawing Only for Reference

I-V Curves

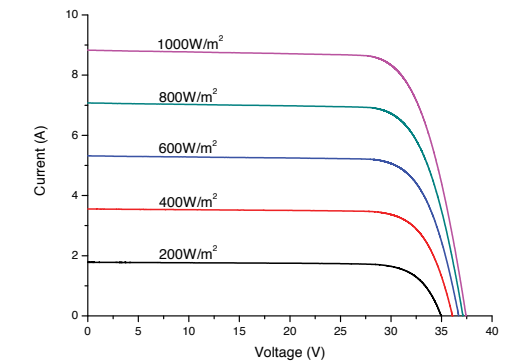

Efficiency at Varied Irradiation

Irradiance	200W/m ²	400W/m ²	600W/m ²	800W/m ²	1000W/m ²
Efficiency	15.1%	15.4%	15.5%	15.5%	15.4%

Electrical Characteristics STC

	JC235M-24/Bb	JC240M-24/Bb	JC245M-24/Bb	JC250M-24/Bb
Maximum Power (Pmax)	235 W	240 W	245 W	250 W
Power Tolerance	0 ~+ 5W	0 ~+ 5W	0 ~+ 5W	0 ~+ 5W
Module Efficiency	14.4%	14.8%	15.1%	15.4%
Maximum Power Current (Imp)	8.03 A	8.08 A	8.19 A	8.31 A
Maximum Power Voltage (Vmp)	29.3 V	29.7 V	29.9 V	30.1 V
Short Circuit Current (Isc)	8.58 A	8.64 A	8.73 A	8.83 A
Open Circuit Voltage (Voc)	37.0 V	37.2 V	37.3 V	37.4 V

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics NOCT

	JC235M-24/Bb	JC240M-24/Bb	JC245M-24/Bb	JC250M-24/Bb
Maximum Power (Pmax)	174 W	178 W	182 W	185 W
Maximum Power Current (Imp)	6.42 A	6.51 A	6.53 A	6.57 A
Maximum Power Voltage (Vmp)	27.1 V	27.4 V	27.9 V	28.2 V
Short Circuit Current (Isc)	6.92 A	6.97 A	7.04 A	7.12 A
Open Circuit Voltage (Voc)	34.4 V	34.7 V	35.0 V	35.0 V

Values at Normal Operating Cell Temperature, Irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s

Mechanical Characteristics

Cell Type	156 x156 mm Polycrystalline, 60 (6x10) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP65 rated, with bypass diodes
Dimension	*1640 x 992 x 40 mm
Cable Length	1000 mm
Weight	19 Kg
Installation Hole Location	See Drawing Above

Characteristics

Temperature Coefficient of Voc	-0.30%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.40%/°C
Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C

Packing Information

Container	20' GP	40' GP
Pallets per Container	12	28
Pieces per Container	300	700

Rev No: JC/TDS/2012.03 *Contact ReneSola for tolerance specification
CAUTION: All rights reserved. Design and specification are subject to change without prior notice.

Maximum Ratings

Operating Temperature	-40°C ~ + 85°C
Maximum System Voltage	1000VDC (EU) / 600VDC (US)
Maximum Series Fuse Rating	20A (EU) / 15A (US)